

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

10/509109

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
9 October 2003 (09.10.2003)

PCT

(10) International Publication Number
WO 03/082533 A1(51) International Patent Classification⁷: B26B 9/00.
21/60, B23B 27/14, B23P 15/28, C23C 16/04[RU/GB]; 49 Flatford Place, Kidlington, Oxfordshire OX5
1TQ (GB). ZHUK, Yuri [RU/GB]; 10 Hurdswell, Long
Hanborough, Witney, Oxfordshire OX29 8DH (GB)

(21) International Application Number: PCT/GB03/01219

(74) Agent: HARRISON GODDARD FOOTE; Belgrave
Hall, Belgrave Street, Leeds LS2 8DD (GB)

(22) International Filing Date: 21 March 2003 (21.03.2003)

(25) Filing Language: English


(81) Designated States (*national*): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GI, GR,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW

(26) Publication Language: English

(30) Priority Data:
0207375 7 28 March 2002 (28.03.2002) GB(71) Applicant (*for all designated States except US*): HAR-
DIDE LIMITED [GB/GB]; Begbroke Innovation Centre,
Building 5, Sandy Lane, Yarnton, Oxfordshire OX5 1PF
(GB).(84) Designated States (*regional*): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

[Continued on next page]

(54) Title: SELF-SHARPENING CUTTING TOOL WITH HARD COATING

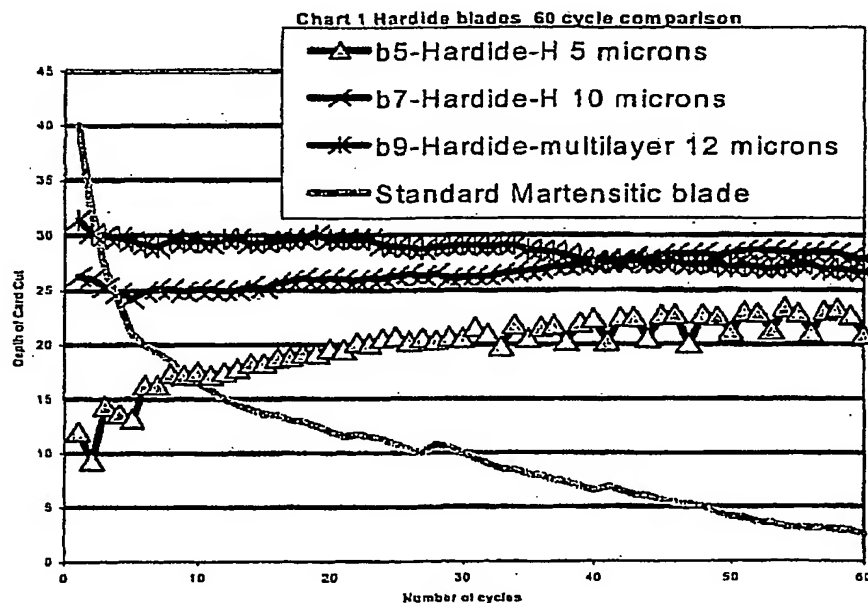

(57) Abstract: There is disclosed a cutting tool having a blade coated on one side with a hard coating having a laminar or layered microstructure. The coating tends to wear evenly and smoothly, thereby keeping a cutting edge of the cutting tool smooth. Furthermore, by coating the cutting edge on one side only, the cutting edge becomes self-sharpening. The coating preferably includes at least one layer made of tungsten carbides substantially or entirely free of metallic tungsten.

BEST AVAILABLE COPY